


Parameters of the Crystal 产品参数性能

	Ceramic Resonator	ZTT Series
1	Withstanding Voltage (V)	100 (DC, 5s max)
2	Insulation Resistance Ri, (MΩ) min.	500 (Applied DC10V)
3	Operating Temperature Range (°C)	-25~+85
4	Storage Temperature Range (°C)	-40~+85
5	Rating Voltage U _r (V) max.	6V DC
6		15V p-p
7	Oscillation Frequency Fosc (MHz)	2.000~20.000
8	Frequency Accuracy (%)	±0.5
9	Resonant Impedance Ro (Ω) max.	25
10	Temperature Coefficient of Oscillation Frequency (%) max.	±0.3 (Oscillation Frequency drift, -25°C~+85°C)
11	Oscillation Frequency Aging Rate (10years) (%) max *	±0.3 (From initial value)
12	Marking	**, **
13	Packing Unit	500pcs/Bag




Outline drawing 外观尺寸

单位: mm

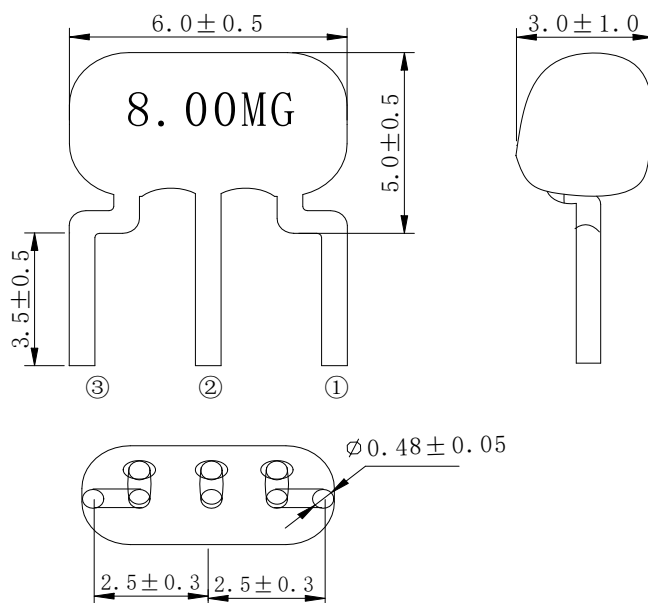

① INPUT ② GROUND ③ OUTPUT
*: EIAJ MONTHLY CODE

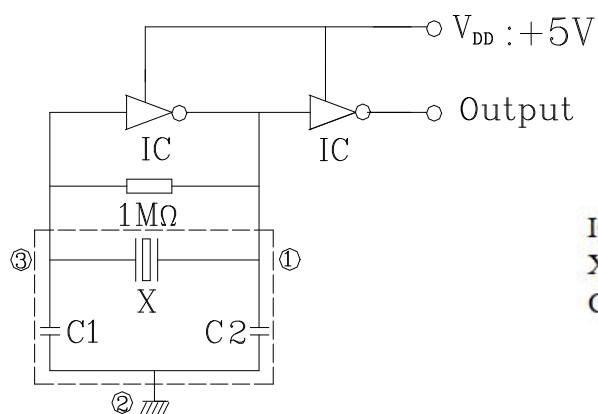

IC: 1/6TC4069UBP×2
X: CERAMIC RESONATOR
C1,C2: 15 (1±20%) PF